

MALICOAT-WINSLOW ENGINEERS, P.C.

5649 NORTH CLEARVIEW ROAD
COLUMBIA, MISSOURI 65202-9687


FREDDIE L. MALICOAT, P.E.
573-875-1300 EXT 22

MECHANICAL AND ELECTRICAL ENGINEERS
email: info@mwengrs.com
Fax: 573-875-1305

February 13, 2008

Re: Bid Number: 05-21FEB08 - Addendum #2

- Item 1. Omit general note #13 on Plan Sheet M1.
- Item 2. Omit all boilers and related gas piping to boilers and unit heater.
- Item 3. Add: tanks #8, and #9, to be sandblasted, primed, and painted.
- Item 4. Add: tanks #1, #3, #4, and #5, to be sandblasted, and primed.
- Item 5. See revised bid form.
- Item 6. Use a urethane top coat, compatible with primer, for painted tanks.
- Item 7. Prime and paint cat walks and rails with same paint as tanks.

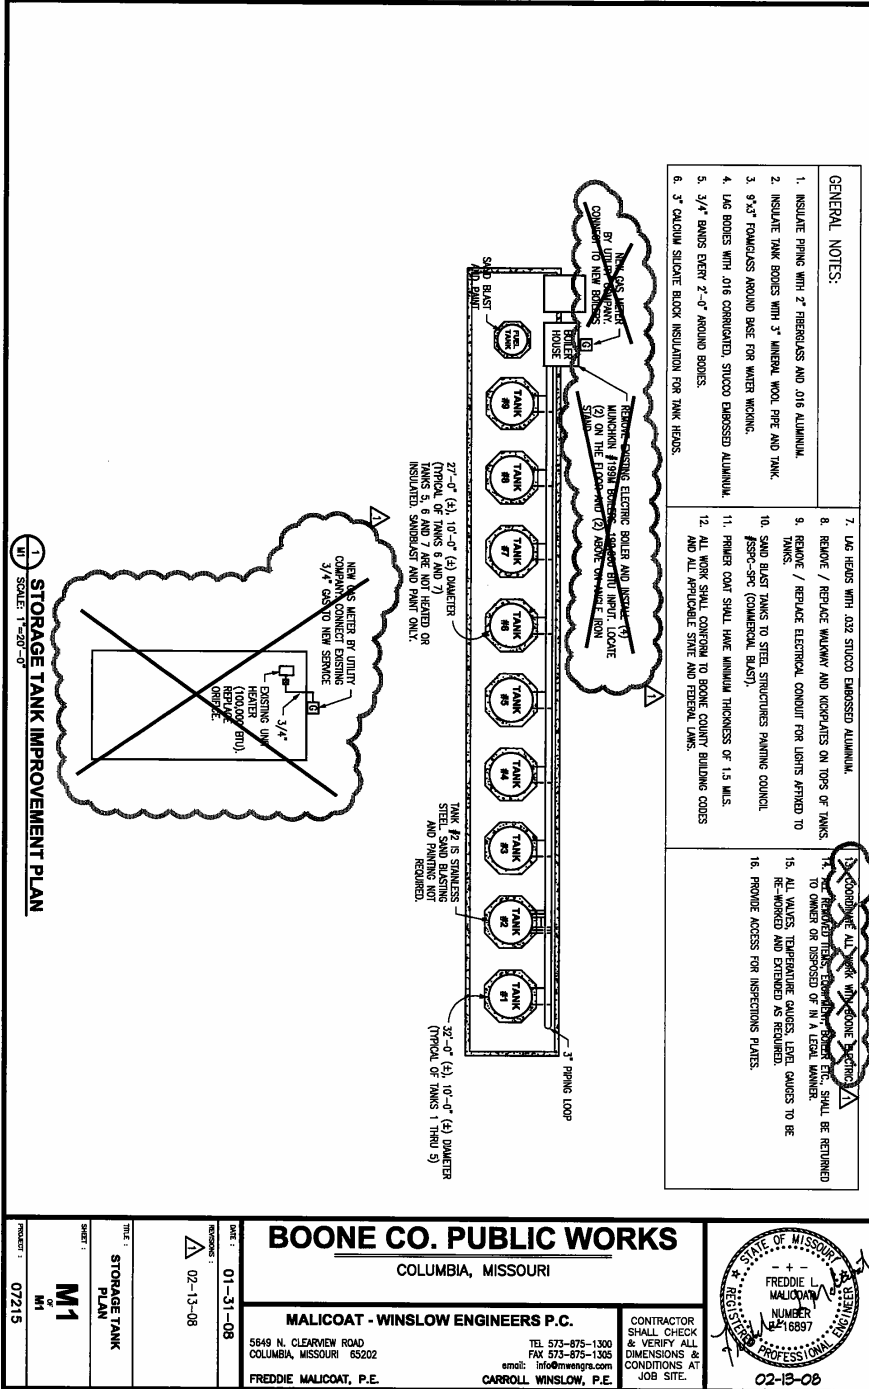

- GENERAL NOTES:**
- INSULATE PIPING WITH 2" FIBERGLASS AND 016 ALUMINUM.
 - INSULATE TANK BODIES WITH 3" MINERAL WOOL PIPE AND TANK.
 - 9"x4" FOMGLASS AROUND BASE FOR WATER WADING.
 - LAG BODIES WITH 016 CORRUGATED STUCCO EMBOSSED ALUMINUM.
 - 3/4" BANES EVERY 2'-0" AROUND BODIES.
 - 3" POLYURETHANE BLOCK INSULATION FOR TANK HEADS.
 - LAG HEADS WITH 032 STUCCO EMBOSSED ALUMINUM.
 - REMOVE / REPLACE WALKWAY AND REOPERATES ON TOPS OF TANKS.
 - REMOVE / REPLACE ELECTRICAL CONDUIT FOR LIGHTS AFFIXED TO TANKS.
 - SAND BLAST TANKS TO STEEL STRUCTURES PAVING COUNCIL.
 - ASPC-SiPC (COMMERCIAL GRAD).
 - PRIMER COAT SHALL HAVE MINIMUM THICKNESS OF 1.5 MILS.
 - ALL WORK SHALL CONFORM TO BOONE COUNTY BUILDING CODES AND ALL APPLICABLE STATE AND FEDERAL LAWS.
 - COORDINATE ALL WORK WITH EXISTING UTILITY TO OWNER OR DISPOSED OF IN A LEGAL MANNER.
 - ALL VALVES, TEMPERATURE GAUGES, LEVEL GAUGES TO BE RE-WORKED AND EXTENDED AS REQUIRED.
 - PROVIDE ACCESS FOR INSPECTION PLATES.

1 STORAGE TANK IMPROVEMENT PLAN
SCALE: 1"=20'-0"

BOONE CO. PUBLIC WORKS COLUMBIA, MISSOURI		
MALICOAT - WINSLOW ENGINEERS P.C. 5649 N. CLEARVIEW ROAD COLUMBIA, MISSOURI 65202 TEL 573-875-1300 FAX 573-875-1305 email: info@mwengrs.com FREDDIE MALICOAT, P.E.		
SHEET: M1 OF M1	DATE: 01-31-08 REVISIONS: 02-13-08	CONTRACTOR SHALL CHECK & VERIFY ALL DIMENSIONS & CONDITIONS AT JOB SITE. 02-13-08

BID FORM
Boone County Public Works Installation of Tank Insulation

Bidder agrees to perform all the work described in the specifications and shown on the plans, for the following price for the Boone County Public Works Installation of Tank Insulation project:	
Description	Price
Base Bid	\$
After Notice to Proceed is issued, contractor will begin work on this project within _____ days.	_____ days
Project will be completed within _____ business days after first day of work commencement.	_____ days

BIDDER has examined copies of all the Bidding Documents and of the following Addenda (receipt of all which is hereby acknowledged):

DATE

ADDENDUM NUMBER

COMPANY NAME: _____

ADDRESS: _____

CITY, STATE, ZIP _____

PHONE NUMBER: _____

AUTHORIZED REPRESENTATIVE: _____

TITLE: _____

SIGNATURE: _____