



BOONE COUNTY, MISSOURI

Request for Bid #: 27-19MAY16 – Chain Link Fence Installation

ADDENDUM #1 - Issued April 26, 2016

This addendum is issued in accordance with the Request for Bid Response Page in the Request for Bid and is hereby incorporated into and made a part of the Request for Bid documents. Bidders are reminded that receipt of this addendum should be acknowledged and submitted with Bidder's Response Form.

Specifications for the above noted Request for Bid and the work covered thereby are herein modified as follows, and except as set forth herein, otherwise remain unchanged and in full force and effect.

1. REPLACE Section 2.2.2.2. with the following language: This area contains underground electrical lines, equipment grounding conductors, fiber optic cable and communication wires. Posts being placed near the equipment shelter shall be hand excavated to avoid any damage to underground facilities.
2. ADD Section 2.2.2.3. Fence shall be constructed with a bottom wire around full fence perimeter and three strand barbed wire at top with post-top and corner barb arms. Vendor to furnish gates at specified locations as shown on Attachment D.
3. CHANGE wording in Section 2.2.3 from "EEC Storage area" to "ECC Storage area".
4. REPLACE Section 2.2.3.1. with the following language: Fencing under this section will be installed in the unfinished lower level of the new ECC building. Building construction style in this area consists of poured concrete walls, floor and ceiling. Posts shall be securely attached using floor flanges with wedge style concrete anchors and supported with wall or ceiling clamps to prevent fence movement and support gate operation. Gate support posts must be securely attached to support gate swing operation. Work will include approximately 78 lineal feet of fence construction. There is vehicle drive access very near to this work area.
5. ADD Section 2.2.3.2. Fencing shall be nominal 8' height with top rail and bottom wire. No barbed wire will be used. Vendor to furnish gates at specified locations as shown on Attachment D. Each gate pair shall have one rod or pin to anchor into concrete floor and a gate latch that can be secured with a padlock. The floor area below gates must remain clear of plates or attachments to permit the use of pallet jacks.
6. ADD Section 2.2.4.3. This area contains underground electrical lines, equipment grounding conductors, fiber optic cable and communication wires. Posts being placed

near the equipment shelter shall be hand excavated to avoid any damage to underground facilities.

7. Replace drawing on page 21, Boone County 911/Emergency Management Storage (site three) with the attached.

By: 
Melinda Bobbitt, CPPO, CPPB
Director of Purchasing

BIDDER has examined **Addendum #1** to Request for Bid # 27-19MAY16 – *Chain Link Fence Installation*, receipt of which is hereby acknowledged:

Company Name: _____

Address: _____


Phone Number: _____ Fax Number: _____

E-mail: _____

Authorized Representative Signature: _____ Date: _____

Authorized Representative Printed Name: _____

ECC STORAGE

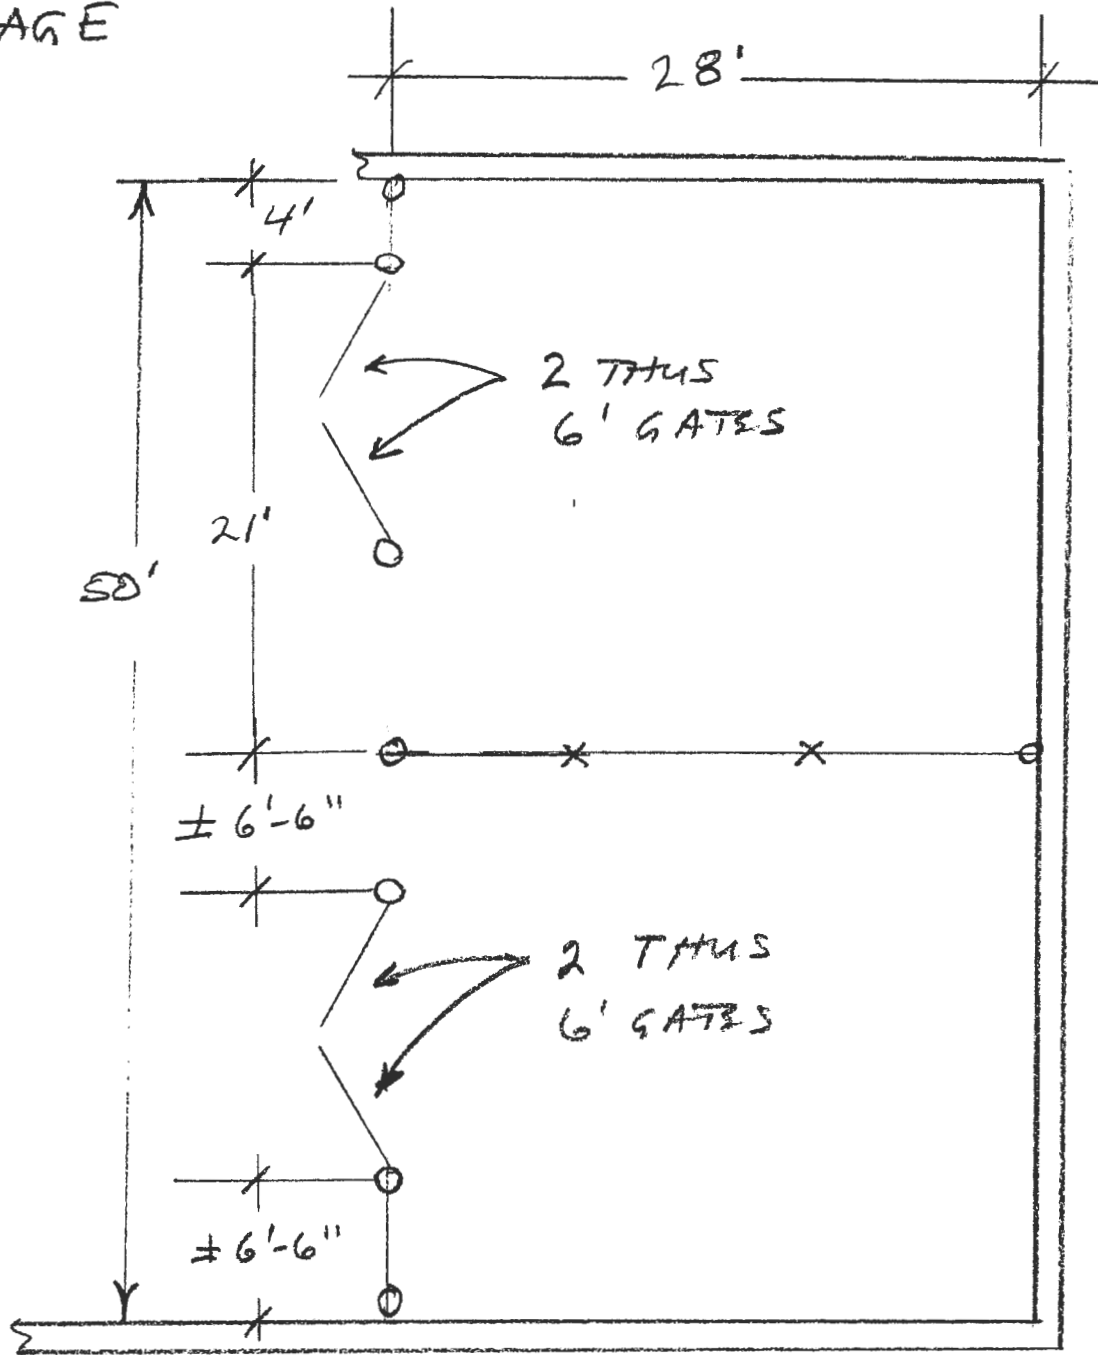

$$\frac{1}{8}'' = 1'$$