



BOONE COUNTY, MISSOURI
Request for Bid #: 24-25 MAY 17
Boone County Hill Creek Road Bridge

ADDENDUM #1 - Issued May 12, 2017

This addendum is issued in accordance with the Request for Bid Notice to Bidders and is hereby incorporated into and made a part of the Request for Bid Documents. Offerors are reminded that receipt of this addendum **should** be acknowledged and submitted with Offeror's *Response Form*.

Specifications and Plans for the above noted Request for Bid and the work covered thereby are herein modified as follows, and except as set forth herein, otherwise remain unchanged and in full force and effect:

1. Specifications Cover Page:

Replace the Project Manager contact information with the following:

Jeff McCann, P.E.
Boone County Resource Management
801 E. Walnut, Room 315
Columbia, Missouri 65201
Phone: (573) 886-4480
Fax: (573) 886-4340
E-mail: jmccann@boonecountymo.org

2. Bid Form – Itemized Proposal Page 4:

Remove Page 4 of the Itemized Proposal and replace it with the attached Page 4 to eliminate the duplicate line item 27 for Reinforcing Steel.

3. Job Special Provisions – Item K – Material Certification and Testing:


Remove the entire third paragraph and replace it with the following:

The Contractor shall provide quality control testing for the cast-in-place concrete bridge sub-structure. Testing shall be completed by an independent testing laboratory selected by the Contractor and approved by the Owner's Engineer. All payment for costs associated with this testing shall be the Contractor's responsibility and shall be incidental to the Class B-1 Sub-Structure Concrete item on the Bid Form. Slump, air, and temperature shall be tested once for each pour on each abutment and intermediate bent. Sampling procedures shall follow AASHTO T 141. Slump test shall be in accordance with AASHTO T119, and Air Entrainment shall be tested in accordance with AASHTO T 152. Compressive strength tests shall be conducted in accordance with ASTM C1231 and T22. One (1) set of three (3) cylinders minimum shall be taken for each pour on each abutment and intermediate bent. Test results of the 7 day and 28 day breaks shall be submitted to Boone County within 24 hours of breaking the cylinders.

By: 
Phil Fichter, Buyer
Boone County Purchasing

Approved: Shannon J. Howe, P.E., S.E.
Professional Engineer
MO Lic. # PE-2000162117

Howe Company, LLC
MO Engineering Corp. # 2014014993
1119 S Missouri St, Ste A
Macon, Missouri 63552
Phone: 660-395-4693
Fax: 660-395-4694

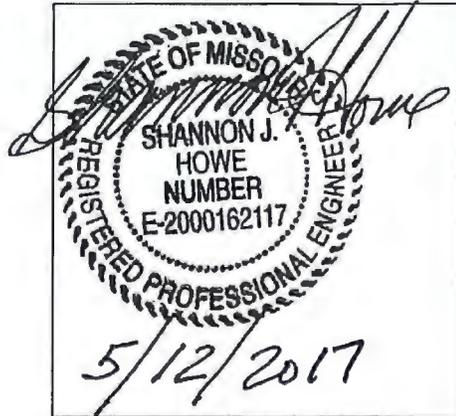

OFFEROR has examined copy of Addendum #1 to Request for Bid # 24-25 May 17 – Boone County Hill Creek Road Bridge, receipt of which is hereby acknowledged:

Company Name: _____

Address: _____

Phone Number: _____ Fax Number: _____

Authorized Representative Signature: _____ Date: _____

Authorized Representative Printed Name: _____

ITEMIZED PROPOSAL

BRIDGE ITEMS BY CONTRACTOR

BASE BID ITEMS							
-----------------------	--	--	--	--	--	--	--

LINE	SPEC	ITEM	DESCRIPTION	UNIT	QUANTITY	UNIT PRICE	AMOUNT
28	MoDOT	712/JSP	Pre-Fabricated Super-structure (Span 1-2)	L.S.	1	XXXXXXXXXXXX	_____
29	MoDOT	712/JSP	Pre-Fabricated Super-structure (Span 2-3)	L.S.	1	XXXXXXXXXXXX	_____
30	MoDOT	712/JSP	Pre-Fabricated Super-structure (Span 3-4)	L.S.	1	XXXXXXXXXXXX	_____
31	MoDOT	713	SL-1 Rail On Bridge	L.F.	188	_____	_____
32	MoDOT	716.10	Plain Neoprene Bearing Pads	EACH	6	_____	_____

Sub-Total Bridge Items = _____

TOTAL CONTRACTOR BID = _____